

Acronis

Acronis Cyber Infrastructure 3.0

Quick Start Guide

November 20, 2019

Copyright Statement

Copyright ©Acronis International GmbH, 2002-2019. All rights reserved.

"Acronis" and "Acronis Secure Zone" are registered trademarks of Acronis International GmbH.

"Acronis Compute with Confidence", "Acronis Startup Recovery Manager", "Acronis Instant Restore", and the Acronis logo are trademarks of Acronis International GmbH.

Linux is a registered trademark of Linus Torvalds.

VMware and VMware Ready are trademarks and/or registered trademarks of VMware, Inc. in the United States and/or other jurisdictions.

Windows and MS-DOS are registered trademarks of Microsoft Corporation.

All other trademarks and copyrights referred to are the property of their respective owners.

Distribution of substantively modified versions of this document is prohibited without the explicit permission of the copyright holder.

Distribution of this work or derivative work in any standard (paper) book form for commercial purposes is prohibited unless prior permission is obtained from the copyright holder.

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

Third party code may be provided with the Software and/or Service. The license terms for such third-parties are detailed in the license.txt file located in the root installation directory. You can always find the latest up-to-date list of the third party code and the associated license terms used with the Software and/or Service at <http://kb.acronis.com/content/7696>.

Acronis patented technologies

Technologies, used in this product, are covered and protected by one or more U.S. Patent Numbers: 7,047,380; 7,246,211; 7,275,139; 7,281,104; 7,318,135; 7,353,355; 7,366,859; 7,383,327; 7,475,282; 7,603,533; 7,636,824; 7,650,473; 7,721,138; 7,779,221; 7,831,789; 7,836,053; 7,886,120; 7,895,403; 7,934,064; 7,937,612; 7,941,510; 7,949,635; 7,953,948; 7,979,690; 8,005,797; 8,051,044; 8,069,320; 8,073,815; 8,074,035; 8,074,276; 8,145,607; 8,180,984; 8,225,133; 8,261,035; 8,296,264; 8,312,259; 8,347,137; 8,484,427; 8,645,748; 8,732,121; 8,850,060; 8,856,927; 8,996,830; 9,213,697; 9,400,886; 9,424,678; 9,436,558; 9,471,441; 9,501,234; and patent pending applications.

Contents

- 1. Introduction 1**
 - 1.1 About This Guide 1
 - 1.2 Hardware Requirements 1

- 2. Installing Acronis Cyber Infrastructure 3**

- 3. Creating the Storage Cluster 5**

- 4. Enabling Management Node High Availability 7**

- 5. Deploying Compute Cluster 10**

- 6. Creating a Virtual Machine 14**

CHAPTER 1

Introduction

1.1 About This Guide

This guide describes how to set up a full-fledged storage cluster on three nodes, deploy a compute cluster on top of it, and create a virtual machine.

1.2 Hardware Requirements

A minimum Acronis Cyber Infrastructure installation recommended for production consists of three nodes for storage and compute services with enabled high availability for the management node. This is to ensure that the cluster can survive failure of one node without data loss. The following table lists the *minimal* hardware requirements for all the three nodes. The recommended configurations are provided in the “Hardware Requirements” section of the *Installation Guide*.

Table 1.2.1: Node hardware requirements

| Type | Management and storage/compute node |
|------|--|
| CPU | 64-bit x86 processors with AMD-V or Intel VT hardware virtualization extensions enabled. 16 logical CPUs* |
| RAM | 32 GB** |

Continued on next page

Table 1.2.1 – continued from previous page

| Type | Management and storage/compute node |
|---------|--|
| Storage | 1 disk: system + metadata, 100+ GB SATA HDD 1 disk: storage, SATA HDD, size as required |
| Network | 1 GbE for storage traffic 1 GbE (VLAN tagged) for other traffic |

* A logical CPU is a core (thread) in a multicore (multithreading) processor.

** Each chunk server (CS), e.g., storage disk, requires 1 GB of RAM (0.5 GB anonymous memory + 0.5 GB page cache). The total page cache limit is 12 GB. In addition, each metadata server (MDS) requires 0.2 GB of RAM + 0.1 GB per 100TB of physical storage space.

CHAPTER 2

Installing Acronis Cyber Infrastructure

To install Acronis Cyber Infrastructure, do the following:

1. Prepare bootable media using the distribution ISO image (mount it to an IPMI virtual drive, create a bootable USB drive, or set up a PXE server).
2. Boot the server from the chosen media.
3. On the welcome screen, choose **Install Acronis Cyber Infrastructure**.
4. On step 1, please carefully read the End-User License Agreement. Accept it by ticking the **I accept the End-User License Agreement** checkbox and click **Next**.
5. On step 2, configure a static IP address for the NIC and provide a hostname: either a fully qualified domain name (hostname, domainname) or a short name (hostname).
6. On step 3, choose your time zone. Date and time will be set via NTP. You will need an Internet connection for synchronization to complete.
7. On step 4, specify what type of node you are installing. First, deploy one primary node. Then, deploy as many secondary nodes as you need.
 - If you chose to deploy the primary node, select two network interfaces: for internal management and configuration and for access to the admin panel. Also create and confirm a password for the superadmin account of the admin panel.
 - If you chose to deploy a secondary node, provide the IP address of the management node and the token. Both are obtained from the admin panel. Log in to the admin panel on port 8888. Panel's IP address is shown in the console after deploying the primary node. Use the default user name

shown on the login screen and the primary node's root password. In the admin panel, open **INFRASTRUCTURE > Nodes** and click **ADD NODE** to invoke a screen with the management node address and the token.

The node may appear on the **INFRASTRUCTURE > Nodes** screen in the **UNASSIGNED** list as soon as token is validated. However, you will be able to join it to the storage cluster only after the installation is complete.

8. On step 5, choose a disk for the operating system. This disk will have the supplementary role **System**, although you will still be able to set it up for data storage in the admin panel. You can also create software RAID1 for the system disk to ensure its high performance and availability.
9. On step 6, enter and confirm the password for the root account and click **Start installation**.


Once the installation is complete, the node will reboot automatically. The admin panel IP address will be shown in the welcome prompt.

CHAPTER 3

Creating the Storage Cluster

To create the storage cluster, do the following:

1. Open the **INFRASTRUCTURE > Nodes** screen and click a node in the **UNASSIGNED** list.
2. On the node overview screen, click **Create cluster**.
3. In the **Cluster** field, type a name for the cluster. The name may only contain Latin letters (a-z, A-Z), numbers (0-9), underscores (“_”) and hyphens (“-”).

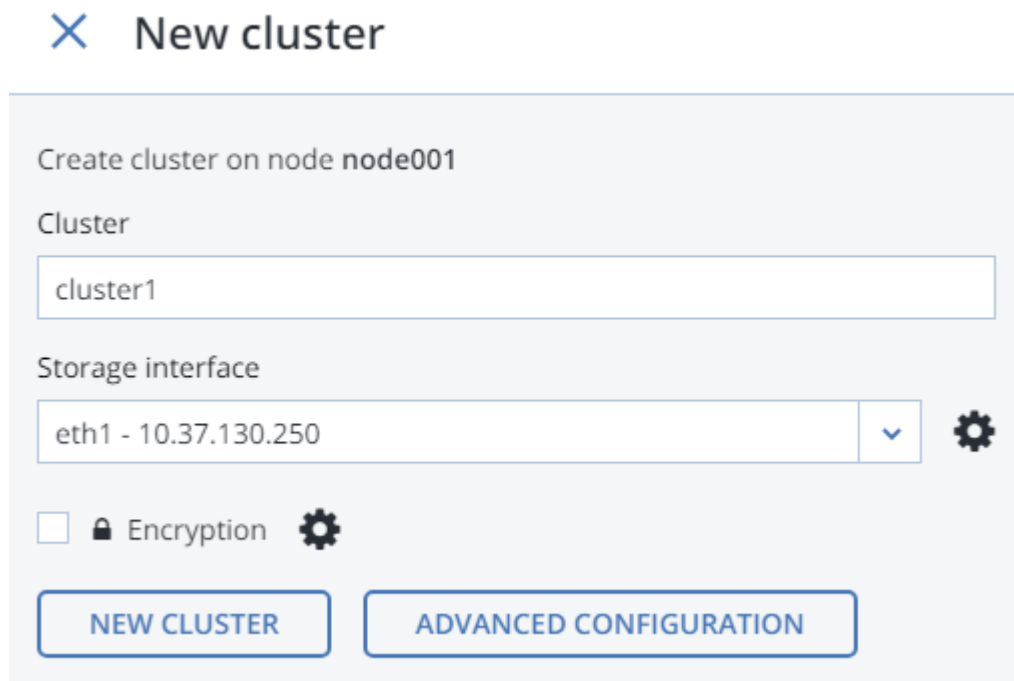

The screenshot shows a dialog box titled "New cluster" with a close button (X) in the top left. The dialog contains the following elements:



- A header: "Create cluster on node **node001**"
- A label: "Cluster"
- A text input field containing "cluster1".
- A label: "Storage interface"
- A dropdown menu showing "eth1 - 10.37.130.250" with a downward arrow and a gear icon to its right.
- A checkbox labeled "Encryption" with a gear icon to its right.
- Two buttons at the bottom: "NEW CLUSTER" and "ADVANCED CONFIGURATION".

4. Click **NEW CLUSTER**.
5. Click the next node in the **UNASSIGNED** list and click **JOIN CLUSTER**.

✕ Join cluster

Node to join: **node002**

Storage interface

eth1 - 10.37.130.28  

[JOIN CLUSTER](#) [ADVANCED CONFIGURATION](#)

6. Repeat the previous step for the remaining unassigned nodes.

You can monitor cluster creation in the **HEALTHY** list of the **INFRASTRUCTURE > Nodes** screen. The creation might take some time depending on the number of disks to be configured. Once the automatic configuration is complete, the cluster is created.

CHAPTER 4

Enabling Management Node High Availability


To make your infrastructure more resilient and redundant, you can create a high availability configuration of three nodes.

Management node HA and compute cluster are tightly coupled, so changing nodes in one usually affects the other. Take note of the following:

1. All nodes in the HA configuration will be added to the compute cluster.
2. Single nodes cannot be removed from the compute cluster as they are included in the HA configuration. In such a case, the compute cluster can be destroyed completely, but the HA configuration will remain. This is also true vice versa, the HA configuration can be deleted, but the compute cluster will continue working.



To enable high availability for the management node and admin panel, do the following:

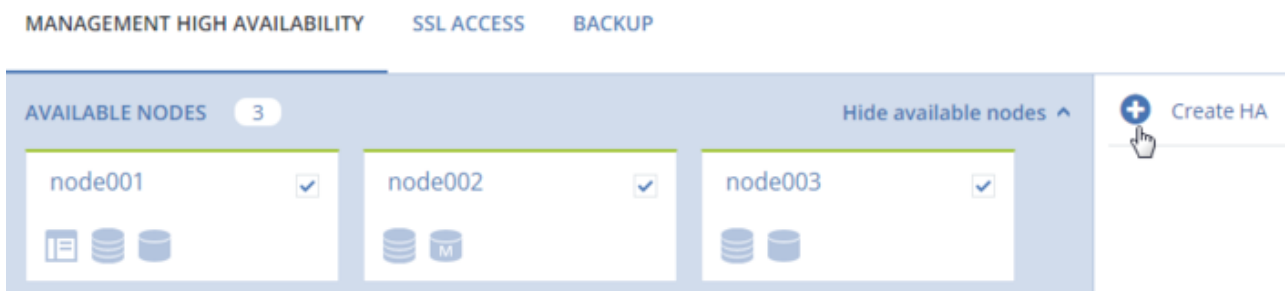

1. Make sure that each node is connected to a network with the **Admin panel** and **Internal management** traffic types.
2. On the **SETTINGS > Management node** screen, open the **MANAGEMENT HIGH AVAILABILITY** tab.





3. Select three nodes and click **Create HA**. The management node is automatically selected.
4. On **Configure network**, check that correct network interfaces are selected on each node. Otherwise, click the cogwheel icon for a node and assign networks with the **Internal management** and **Admin panel** traffic types to its network interfaces. Click **PROCEED**.

✕ Configure network

| | |
|---|---|
|  node001 |  |
| Management | Admin panel |
| eth1 - 10.37.130.250 | br-eth0 - 10.94.17.81 |

| | |
|---|---|
|  node002 |  |
| Management | Admin panel |
| eth1 - 10.37.130.28 | br-eth0 - 10.94.18.146 |

| | |
|---|---|
|  node003 |  |
| Management | Admin panel |
| eth1 - 10.37.130.45 | br-eth0 - 10.94.18.147 |

PROCEED

5. Next, on **Configure network**, provide one or more unique static IP addresses for the highly available admin panel, compute API endpoint, and interservice messaging. Click **DONE**.

< Configure network

Assign unique dedicated virtual IP addresses to these services:

- Admin panel (public access to this web UI)
- Compute API (public access to compute APIs)
- Internal management (private interservice messaging)

In a high availability event, virtual IP addresses will automatically migrate to a healthy node in the high availability cluster to keep services accessible.

Virtual IP address for
Compute API, Admin panel

i The IP address must belong to the network **Public** (10.94.0.0/16)

Virtual IP address for
Internal management

i The IP address must belong to the network **Private** (10.37.130.0/24)

DONE

Once the high availability of the management node is enabled, you can log in to the admin panel at the specified static IP address (on the same port 8888).

CHAPTER 5

Deploying Compute Cluster

Before creating a compute cluster, make sure the following requirements are met:

1. Network is set up according to recommendations in the “Managing Networks and Traffic Types” section of the *Administrator’s Guide*. The basic requirements are: (a) the traffic types **VM private**, **VM public**, and **Compute API** must be assigned to networks; (b) the nodes to be added to the compute cluster must be connected to these networks.
2. All nodes to be added to the compute cluster are connected to the same network with the **VM public** traffic type.
3. High availability for the management node is enabled (see the *Enabling Management Node High Availability* (page 7)).

Also take note of the following:

1. Creating the compute cluster prevents (and replaces) the use of the management node backup and restore feature.
2. If nodes to be added to the compute cluster have different CPU models, consult the section “Setting Virtual Machines CPU Model” in the *Administrator’s Command Line Guide*.

To create the compute cluster, open the **COMPUTE** screen, click **Create compute cluster** and do the following in the **Configure compute cluster** window:

1. In the **Nodes** section, select nodes to add to the compute cluster, make sure the network state of each selected node is **Configured**, and click **Next**.

Nodes in the management node high availability cluster are automatically selected to join the compute cluster.

Configure compute cluster ×

Nodes
Select nodes to add to the compute cluster.

- Nodes
- Public network
- DHCP and DNS
- Summary

| <input checked="" type="checkbox"/> | Name ↓ | Node status | IP address | Network state |
|-------------------------------------|--|-------------|---------------|--|
| <input checked="" type="checkbox"/> | node001.vsto... i | Healthy | 10.37.130.250 | ✔ Configured ⚙ |
| <input checked="" type="checkbox"/> | node002.vstorage... | Healthy | 10.37.130.28 | ✔ Configured ⚙ |
| <input checked="" type="checkbox"/> | node003.vstorage... | Healthy | 10.37.130.45 | ✔ Configured ⚙ |

Next

If node network interfaces are not configured, click the cogwheel icon, select networks as required, and click **Apply**.

- In the **Public network** section, enable IP address management if needed and provide the required details for the public network.

With IP address management enabled, Acronis Cyber Infrastructure will handle virtual machine IP addresses and provide the following features:

- Allocation pools. You can specify ranges of IP addresses that will be automatically assigned to VMs.
- Built-in DHCP server. Assigns IP addresses to virtual machines. With the DHCP server enabled, VM network interfaces will automatically be assigned IP addresses: either from allocation pools or, if there are no pools, from network's entire IP range. With the DHCP server disabled, VM network interfaces will still get IP addresses, but you will have to manually assign them inside VMs.
- Custom DNS servers. You can specify DNS servers that will be used by VMs. These servers will be delivered to virtual machines via the built-in DHCP server.

With IP address management disabled:

- VMs connected to a network will be able to obtain IP addresses from DHCP servers in that network.
- Spoofing protection will be disabled for all VM network ports. Each VM network interface will accept all traffic, even frames addressed to other network interfaces.

In any case, you will be able to manually assign static IP addresses from inside VMs.

If you choose to enable IP address management, select a physical network to connect the public virtual

network to and optionally specify its gateway. The subnet IP range in the CIDR format will be filled in automatically. If you choose to leave IP address management disabled, select a physical network to connect the public virtual network to.

Configure compute cluster ✕

- Nodes
- Public network**
- DHCP and DNS
- Summary

Specify the subnet CIDR and gateway for the external virtual network.

IP address management

Physical network
Public ▾

Subnet CIDR
10.94.0.0/16

Gateway (optional)

[Back](#) [Next](#)

The selected public network will appear in the list of virtual networks on compute cluster's **NETWORKS** tab.

Click **Next**.

3. If you enabled IP address management on the previous step, you will move on to the **DHCP and DNS** section. In it, enable or disable the built-in DHCP server and specify one or more allocation pools and DNS servers. Click **Next**.

Configure compute cluster ✕

- Nodes
- Public network
- DHCP and DNS
- Summary

Set DHCP and specify one or more allocation pools for the public virtual network.

Enable the built-in DHCP server.

Allocation pools + Add pool

10.94.10.128 — 10.94.10.254 126 addresses available ✎ 🗑

DNS servers + Add server

10.94.0.10 ✎ 🗑

Back
Create cluster

4. In the **Summary** section, review the configuration and click **Create cluster**.

Configure compute cluster ✕

- Nodes
- Public network
- DHCP and DNS
- Summary

Review the compute cluster details and go back to change them if necessary.

Nodes
node002.vstoragedomain. (10.37.130.28)
node003.vstoragedomain. (10.37.130.45)
node001.vstoragedomain. (10.37.130.250)

Subnet CIDR 10.94.0.0/16

Physical network Public

DHCP Enabled

Allocation pools 10.94.10.128 — 10.94.10.254
126 addresses available

DNS servers 10.94.0.10

Back
Create cluster

You can monitor compute cluster deployment on the **Compute** screen.

CHAPTER 6

Creating a Virtual Machine

Note: For supported guest operating systems and other information, see the “Managing Virtual Machines” section in the *Administrator’s Guide*.

To create a VM, do the following:









1. On the **COMPUTE > Virtual machines > VIRTUAL MACHINES** tab, click **Create virtual machine**. A window will open where you will need to specify VM parameters.

Create virtual machine ✕

Review the virtual machine details and go back to change them if necessary.


Name
vm1

Deploy from: Image Volume


| | | |
|--|---------|---|
|  Image | Specify |  |
|  Volumes | Specify |  |
|  Flavor | Specify |  |
|  Networks | Specify |  |

Deploy

2. Specify a name for the new VM.
3. In **Deploy from**, choose **Volume** if you have a boot volume or want to create one. Otherwise, choose **Image**.
4. Depending on your choice, click the pencil icon in the **Volumes** or **Image** section and do one of the following:
 - In the **Images** window, select the ISO image or template and click **Done**.

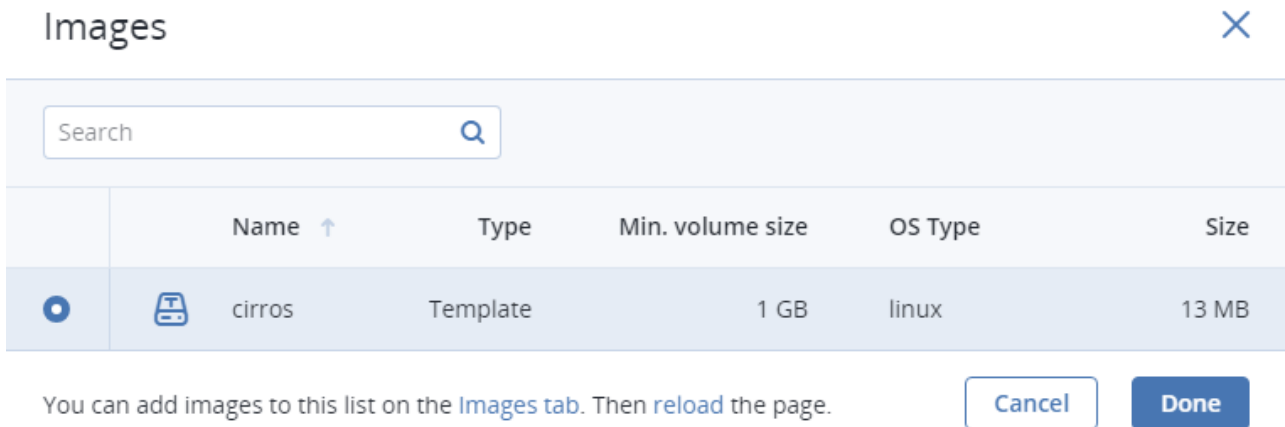

- In the **Volumes** window, do one of the following:
 - If you have prepared a volume with an installed guest OS, click **Attach**, find and select the volume, and click **Done**.

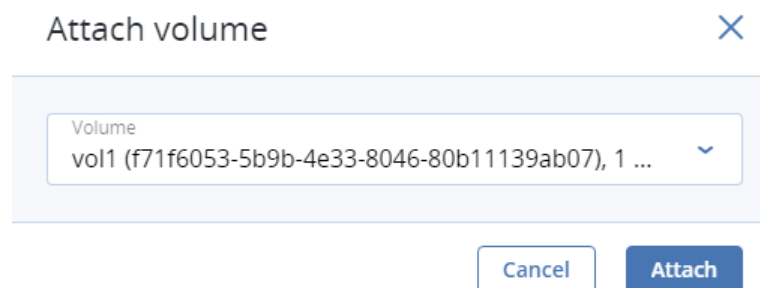

Create volume ✕

Name
vol1

Size (GiB) Min. 1 GiB,
Max. 512 TiB
1

Storage policy
default ▼

Delete on termination

Cancel
Add

5. Optionally, in the **Volumes** window, click **Add** or **Attach** to create or attach any other volumes you need. To select a volume as bootable, place it first in the list by clicking the up arrow button next to it.
6. In the **Flavor** window, choose a flavor and click **Done**.


Flavor ✕

| | Name ↑ | vCPU ↑ | Memory |
|----------------------------------|--------|--------|---------|
| <input checked="" type="radio"/> | tiny | 1 | 512 MiB |
| <input type="radio"/> | small | 1 | 2 GiB |
| <input type="radio"/> | medium | 2 | 4 GiB |
| <input type="radio"/> | large | 4 | 8 GiB |
| <input type="radio"/> | xlarge | 8 | 16 GiB |


You can add flavors to this list on the [Flavors tab](#). Then [reload](#) the page.

Cancel
Done

7. In the network window, click **Add**, select a virtual network interface and click **Add**. It will appear in the **Network interfaces** list.

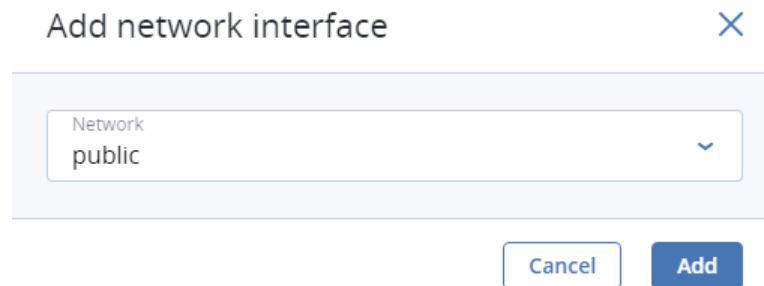

You can edit additional parameters of newly added network interfaces, like IP and MAC addresses and spoofing protection. To do this, click interface's ellipsis icon, then **Edit**, and set parameters in the **Edit network interface** window.

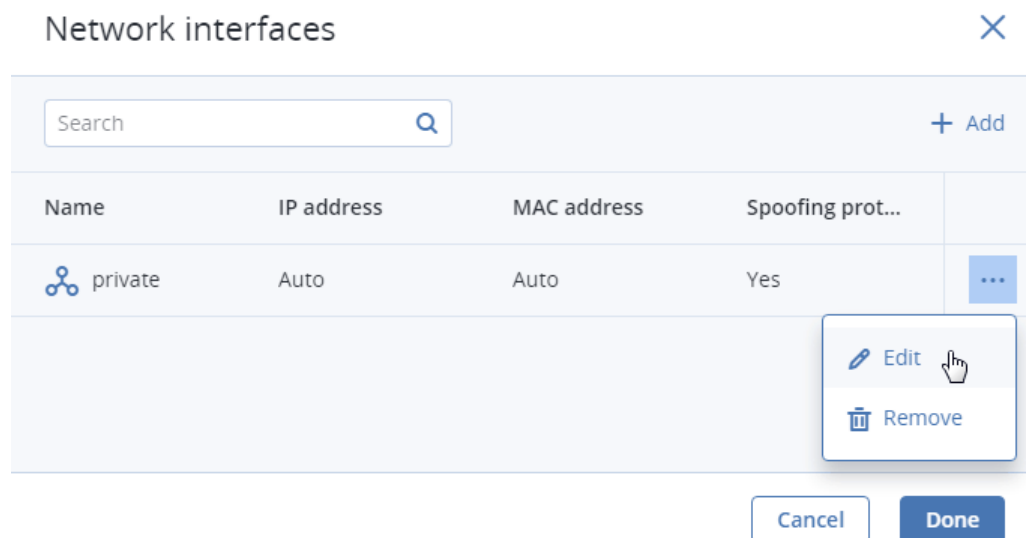

You will not be able to edit these parameters later. Instead, you will be able to delete the old network interface and replace it with a new one.

Dialog box titled "Edit network interface" with a close button (X) in the top right corner. The dialog contains the following fields and controls:

- Name: private
- Subnet CIDR: 192.168.128.0/24
- IP address
- MAC address
- Spoofing protection:

Buttons: Cancel, Save

Click **Done**.

8. (Optional) If you are deploying the VM from a template or boot volume (not an ISO image), you can specify the following:

- An SSH key to be injected into the VM. To do it, select an SSH key in the **Select an SSH key** window, and click **Done**.

Select an SSH key ✕

+ Add

| | Name ↑ | Description ↑ | Created on | |
|----------------------------------|-------------------------|---------------|-----------------------|---|
| <input checked="" type="radio"/> | root_node001vstoragedom | My public key | June 10, 2019 4:23 PM | ⋮ |

i To be able to manage SSH keys, make sure the VM template has cloud-init installed.

Cancel
Done

Note: To be able to connect to the VM via SSH, make sure the VM template or boot volume has cloud-init and OpenSSH installed (see the “Creating SSH-Enabled Templates” section in the *Administrator’s Command Line Guide*).

- User data to customize the VM after launch. To do it, write a script in the **Customization script** field or browse a file on your local server to load the script from.

You can specify user data in one of two formats: cloud-config or shell script. To inject a script in a Windows VM, refer to the [Cloudbase-Init documentation](#).

Provide a customization script ✕

Provide user data to customize the VM after launch. User data can be in one of two formats: cloud-config or shell script. For the guest OS to be customizable, the template must have cloud-init installed.

```
Customization script
#cloud-config
user: myuser
password: password
chpasswd: {expire: False}
ssh_pwauth: True
```

Load from file **user-data** Browse

Cancel Save

Note: For the guest OS to be customizable, make sure the VM template or boot volume has cloud-init installed.

9. Back in the **Create virtual machine** window, click **Deploy** to create and boot the VM.
10. If you are deploying the VM from an ISO image (not a boot volume template or a volume with a pre-installed guest OS), select the VM, click **Console**, and install the guest OS using the built-in VNC console.
11. (Optional) If you are deploying the VM from a prepared template with an injected SSH key, you can connect to it via SSH using the username and the VM IP address:
 - For Linux templates, enter the username that is default for the cloud image OS (for example, for a CentOS cloud image, the default login is centos).

- For Windows templates, enter the username that you specified during Cloudbase-Init installation.
- For VMs customized with user data, enter the username specified in the script.

For example:

```
# ssh myuser@10.10.10.10
```